

SUPPLIED IN RIGID TUBE



MINIMAL SILENT

GLASS

New minimal sliding system for glass doors with wall attachment and gableboard in aluminum, with section only 52mm x 85mm.

Designed for the installation of outside wall sliding glass doors with a light design to better adapt to any environment.

- Linear design
- Movement fluid and noiseless by our MonoSilent program
- Aluminum trolleys, nylon wheels with ball bearings
- Amortized stops
- Profiles and end caps in anodized aluminum
- Easy to install
- Available in 2 kits:
for single door 2 mt and for double door 3 mt
- Individually adjustable trolleys
- Front application and installation
- Applicable on brick, concrete and glass walls
- Including anti-fleeting
- Designed for 8 and 10 mm thickness glass


MINIMAL SILENT

GLASS

outside wall sliding system
for glass doors



www.pettitispaspa.com

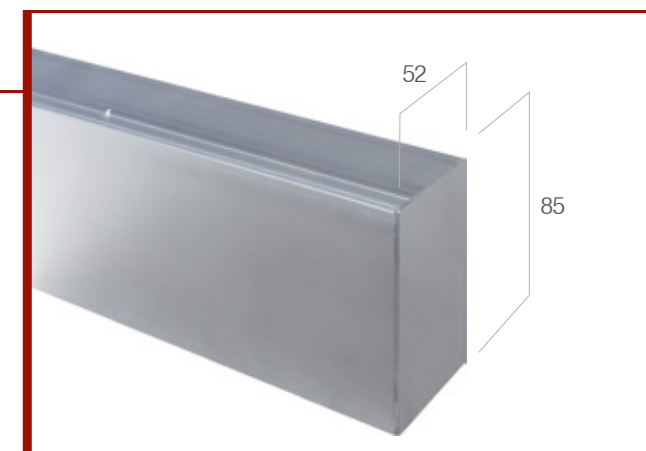

PETTITI GIUSEPPE S.R.L.

Strada Vicinale San Giorgio 19

10036 Settimo Torinese (TO)

Tel. +39 011 8952105 - Fax: +39 011 8951955

pettitispa@pettitispa.com




1



2



3

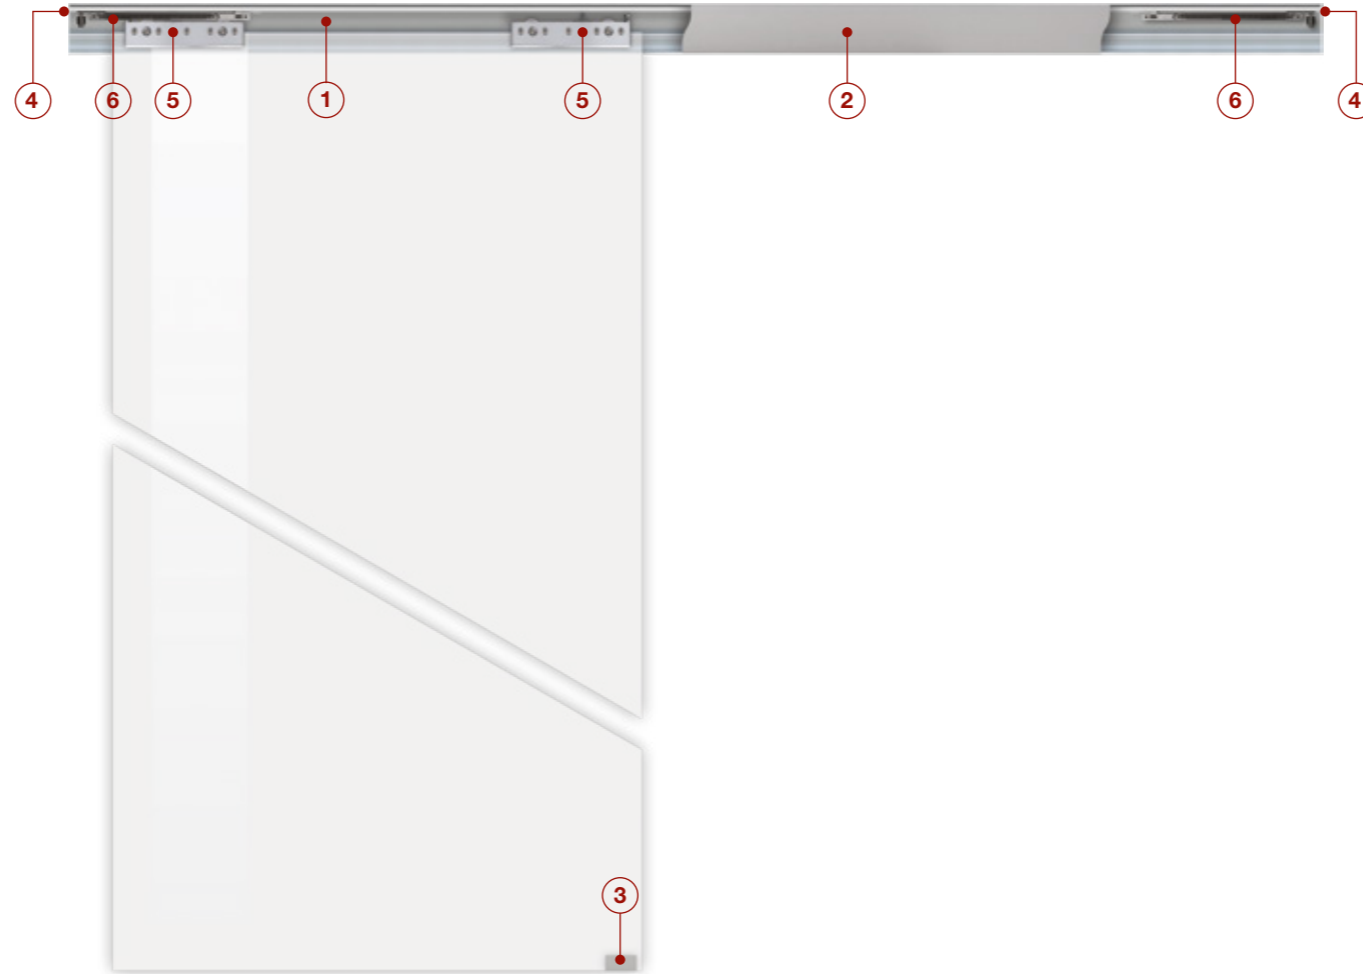

4



5



6



MINIMAL SILENT

GLASS

MINIMAL/V200

Length 2000 mm	
Max capacity 80 kgs / max wing width 950 mm	
Gableboard in anodized aluminum	x1
Wall support profile in anodized aluminum with rail	x1
End caps in anodized aluminum	x2
Sliding trolleys to move 1 wing	x2
Amortized stops	x2

MINIMAL/V300

Length 3000 mm	
Max capacity 80 kgs / max wing width 700+700 mm	
Gableboard in anodized aluminum	x1
Wall support profile in anodized aluminum with rail	x1
End caps in anodized aluminum	x2
Sliding trolleys to move 2 wings	x4
Amortized stops	x2
Standard stops	x2



SPECIAL

On special demand it's possible a special anodization on customer's sample